


Installation Instructions FT 901/903


Description:




For safety reasons, please always wear safety goggles when installing and adjusting the spring door closers.



Screw the spring door closer precisely to the frame and sash of the door and tighten the fixing screws firmly. Ensure that the adjusting holes are always facing upwards.

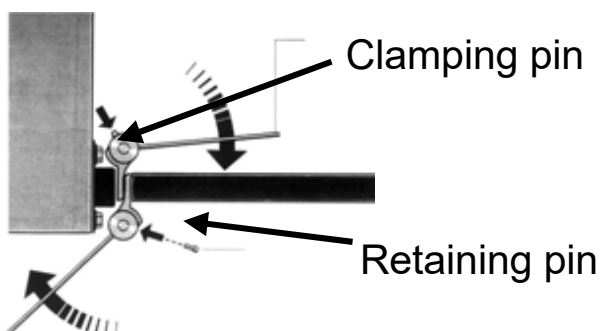

Open the door to approx. 45° and secure it. Now tension the hinge from right to left (clockwise) using the tensioning pin provided. Once the required pre-tensioning force has been reached, insert the retaining pin. Once the retaining pin is firmly fitted, the adjusting pin can be removed.

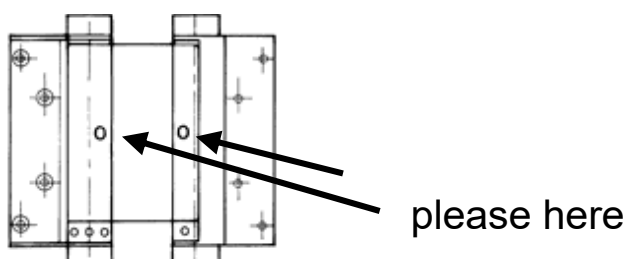

Please lubricate the spring door closer with a light penetrating oil or grease at the marked points before using it for the first time. Repeat this process as required, but at least once a year.

Konstantinstraße 387
41238 Mönchengladbach
Germany

Phone +49 (0) 21 66 / 98 56-0
Fax +49 (0) 21 66 / 98 56-55

info@basi.eu
www.basi.eu

Alles in Sicherheit

